




DC20 4-Door Controller Module

Cloud-managed, secure by default, and built for enterprise scalability, the DC20M 4-door controller module provides flexible mounting options for Rhombus Access Control.

Starting at \$1,199 (MSRP USD)

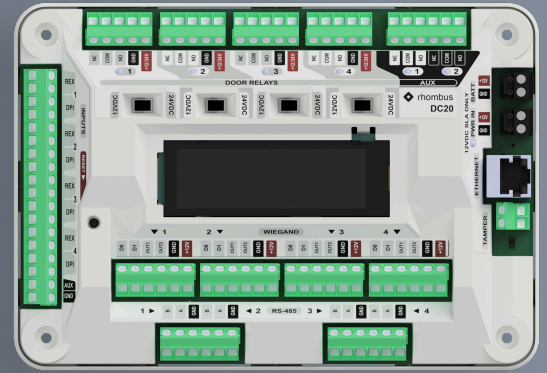

Technical Specifications

Dimensions: 200.7 mm (7.9in) x 140.6 mm (5.54in) x 34.5mm (1.36in)

Power Input: 12VDC, 90W

Relays: 4 Door Relays, 2 Aux Relays

Inputs: 4 REX and 4 DPI (Supervised), 1 AUX input (Unsupervised)

Connectivity: Ethernet 10 / 100Mbps RJ45

Operating Temperature: 32°F - 122°F (0°C - 50°C)

Module Provides Flexible Mounting Options

In the Box: (4) Jumper Wires, (16) 4.7 kΩ Supervision Resistors

Rhombus 10-year Warranty included

The New Standard in Enterprise Access Control



Easy to Install & Scale

Straightforward installation with unified system management across all doors and locations.



Enterprise Reliability

Works with existing hardware and operates during network or power outages.



Reliable Cloud Management

Manage doors and access permissions in real-time from anywhere in the world.



Rhombus Platform Enabled

Seamlessly integrates with all Rhombus security cameras, sensors, and alarms.

