

Secure Card

Give users a High Frequency (13.56 MHz) Smart Card with advanced authentication and encryption features.

Starting at \$399 (MSRP USD)



Technical Specifications

GENERAL CHARACTERISTICS

Dimensions: 85.6mm (3.37in) x 54mm (2.125in) x 0.84mm (0.033in)

Weight: 0.15oz (4.3g)


Material: PVC/PET

Color: White

Surface Finish: Gloss

Operating Temperature: -20°C to 50°C (-4°F to 122°F)

Product Quality: Per ISO/IEC 7810

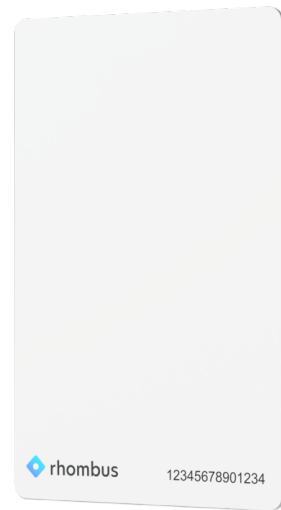

ELECTRICAL CHARACTERISTICS

IC: MIFARE DESFire EV1

Protocol: ISO/IEC 14443A

Operating Frequency: 13.56MHz

Encryption: 128bit AES

Memory: 2KB

UID: 7B

Data Retention: 10 Years

Write Cycles: 100,000

PACKAGING

Quantity: 100 cards per box

Box Dimensions: 114mm (4.5in) x 104mm (4.1in) x 79mm (3.1in)

Shipping Weight: 0.6kg (1.28lbs)



A safer future starts here.

Learn how Rhombus Access Control can secure your spaces and keep your employees and guests safe.

sales@rhombus.com